



Vacuum grippers 120x230



Product Description

- > Use in virtually all automated handling processes: Palletizing, depalletizing, separating, sorting
- > Integrated vacuum generation
- > TL Design: with flow resistor
- > TC Design: with valve technology, allows unoccupied suction openings to be sealed, thereby saving energy
- > Contamination-proof design ensures high availability and process safety
- > Suitable for fast cycle times
- > Simple installation and operation
- > Fast and easy replacement of the foam mats

Ordering notes


Mounting elements for integration of vacuum grippers into gripper systems on request

Technical Data


Item no.	Air consumption at 87 psi [scfm]	Suction power against atmosphere [scfm]	Final vacuum [%]	Weight [lbs]	Suitable foam mat
TL120x230-P20	3.7	6.9	60	3.4	PPF120.230-P20
TL120x230-P40	3.7	6.9	60	3.4	PPF120.230-P40
TC120x230-P20	3.7	12.6	60	5.1	PPF120.230-P20
TC120x230-P40	3.7	6.9	60	5.1	PPF120.230-P40

Diagrams

- > Holding force at 87 psi, depending on the vacuum when working with different permeable materials (values at 100% coverage of the vacuum gripper / 80% coverage – for TL design – is recommended)

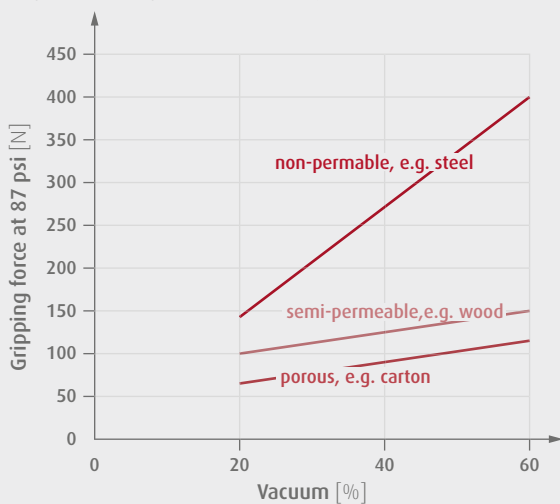


TL120x230-P20 | TL120x230-P40

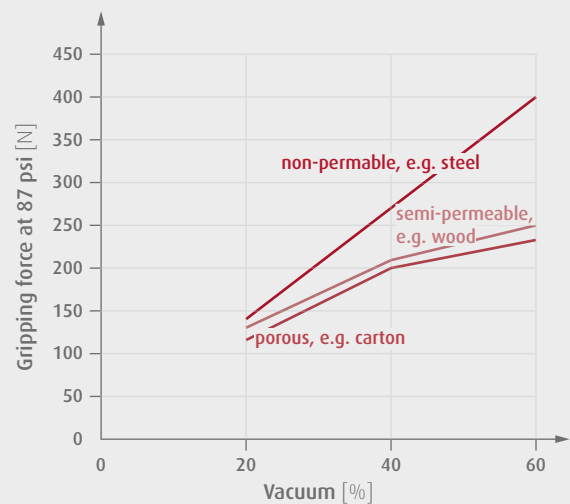

TC120x230-P20 | TC120x230-P40



Dimensions

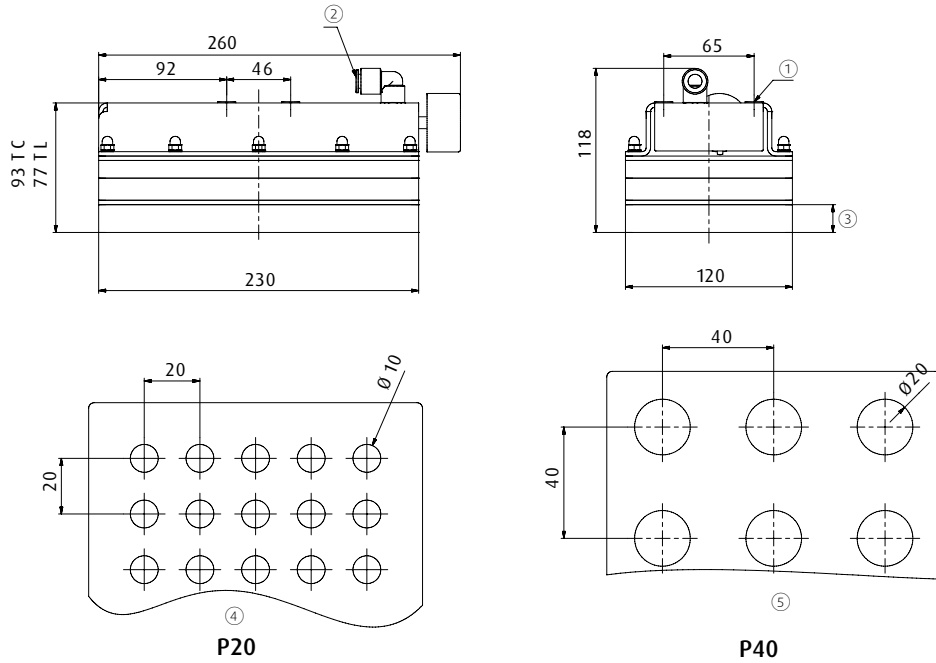

① = Fixing with M6 screws

② = 10 mm quick-fitting

③ = 20 mm foam rubber mat

④ = 50 boreholes

⑤ = 15 boreholes